FEATURES

High Resolution of 580TV Line
Fixed Lens (Optional)
Joystick OSD Controller & Video Test Connector
32x Digital Zoom
256x Sens - up
Digital WDR, HSBLC (High Surpress BLC)
3DNR (3 Dimensional Digital Noise Reduction)
Motion Detection (4 Zone)
Privacy Image Masking with Free Position : 8 Zones

Model : PRO-1600SK

■ Standard
□ Option

SPECIFICATIONS

Image Sensor	1/3" Sony Super HAD II CCD
TV System	NTSC / PAL
Pixels	NTSC = 768(H) x 494(V)
	PAL = 755(H) x 582(V)
Scanning System	2 :1 Interlaced
Sync System	Internal (DC)
Resolution	580TV Line
Minimum Illumination	0.3 Lux (Color), 0.001 Lux (Sens-up : 256x)
S/N Ratio	More than 52 dB
White Balance	ATW / AWC / AWC-SET Manual / Indoor / Outdoor
Gamma Characteristic	0.45
Video output	1.0Vp-p 75 Ohm Composite
Electronic shutter Speed	PAL : 1/50 ~ 1/100,000 Sec
	NTSC : 1/60 ~ 1/120,000 Sec
OSD	Built-in
BLC	Off / BLC / HSBLC Selectable
Sens - up	Auto / Off Selectable (x2 ~ x256)
Day / Night	Color , Auto , B/W, EXT
Motion Detection	On / Off : 4 Zones
Privacy Masking	On / Off : 8 Zones
D - WDR	Off / Indoor / Outdoor
Power Supply	DC12V
Power Consumption	150mA (DC12V)
Lens	3.6mm Fixed Lens (Option : 6.0mm)
Operational Temperature	-10 Deg ~ +50 Deg C RH95% Max
Storage Temperature	-20 Deg ~ +60 Deg C RH95% Max
Weight	Appx. 350 g

DIMENSION

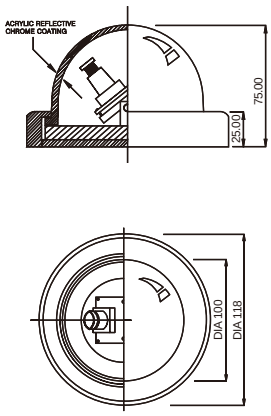

[Unit : mm]

580TVL INDOOR DOME CAMERA